
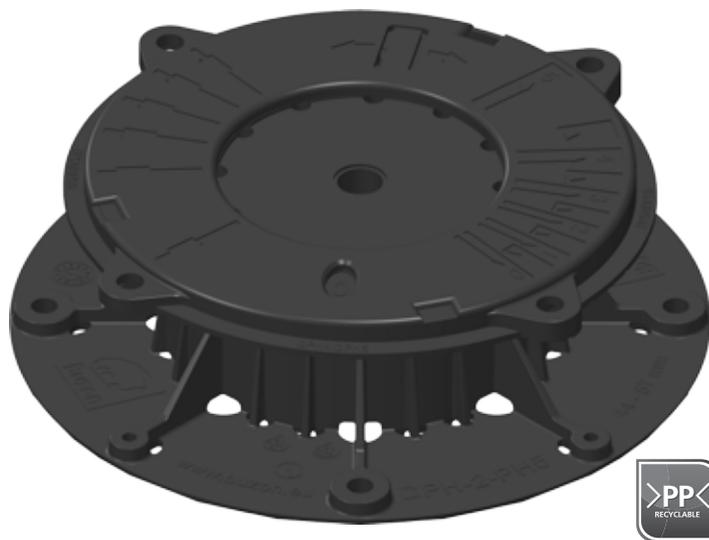


DPH-2-PH5 - height 44-57mm

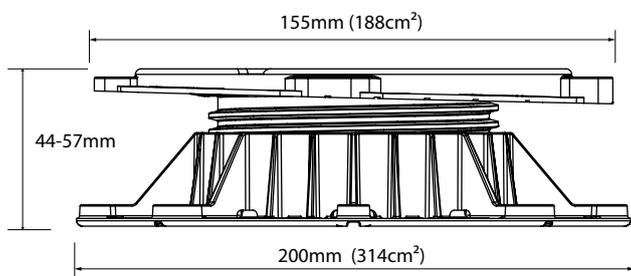

Height range

Adjustable uninterrupted from 44 to 57mm with slope correction of 0-5%.

Composition

The DPH-2-PH5 is comprised of 3 components (base, head and slope corrector).

Material

Co-polymer polypropylene (CPP), material thickness 2 to 5mm.

Composition: 80% CPP **recycled**, 20% talc + UV master batch black, and 100% recyclable.

Dimensions DPH-2-PH5

Top - diameter 155mm, surface area 188cm²

Base - diameter 200mm, surface area 314cm².

Performance characteristics

Resistant to aging, poor weather conditions, UV light, almost all chemicals, and rot proof.

Suitable for use in temperatures from -30°C to +90°C.

Application

Support for raised decks. Can support any type of timber decking or ceramic, stone, concrete paving or flag material, as well as fibreglass or metal grid panels.

Suitable for any kind of stable substrate, including applications directly over insulation panels.

Integral slope corrector

Pre-integrated in the head of the pedestal.


Provides slope correction from 0-5%

(in 0.5% increments).




Accessories

Spacer tabs: For achieving uniform gaps between used decking material. Available in 2, 3, 4.5, 6, 8 and 10mm. Fixed to top of pedestal by clipping in only. Tab heights : 17 or 25mm dependent on tile thickness.



Available with tab widths of 2, 4.5, 6, 8, and 10mm



Available with tab widths of 3 and 4.5mm

Joist support: Supports timber, aluminium or composite joists for most decking systems.



Joist max. 65mm
Thickness 4mm

Shim: Enhances acoustic performance and can help leveling uneven paving materials.



1mm and 2mm
thickness

EPDM -60 Shore

Load capacity (1 daN = 1kg/f = 2.23lb/f)

Tests executed with load bearing on central (1/1), half (1/2) and quarter (1/4) position on the pedestal.

| Position | Height (mm) | Slope | Load (daN) | Load (lbf) |
|----------|-------------|-------|------------|------------|
| 1/1 | 57 | 5% | 1541 | 3436 |
| 1/2 | 57 | 5% | 976 | 2176 |
| 1/4 | 57 | 5% | 490 | 1092 |



Buzon Pedestal International s.a. / n.v.

Z.I. des Hauts-Sarts, Zone 1 - Prolongement rue de l'Abbaye, 134 - B-4040 Herstal - Belgium

Tel +32 (0) 4 248 39 83 Fax +32 (0) 4 264 82 38 E-Mail info@buzon-world.com www.buzon-world.com