

Technical Data Sheet

A-PED-280-325Adjustable from **280** to **325mm**

COMPONENTS

A-PED-280-325 is composed of:

1 x A-PED Head 1 x A-PED Base 1 x TP-2 Turning Plate 1 x 275mm Rod

2 x Locking Nuts

CHARACTERISTICS

Head: ø 90mm Base: ø 170mm Weight: 0.74Kg

Height adjustable from 280-325mm


Slope Corrector: Is integrated in base of the pedestal,

providing slope correction from 0-5%

Fire-Rating: Class Al according to BS EN 13501-1

MATERIAL

Designed and Manufactured in Europe
A-PED-HEAD, A-PED-BASE, TP2: Aluminium
Threaded Rod: M16 zinc plated steel
Locking Nuts: Steel with exterior coating
Resistant to weathering, sea salts and a wide range of chemicals.

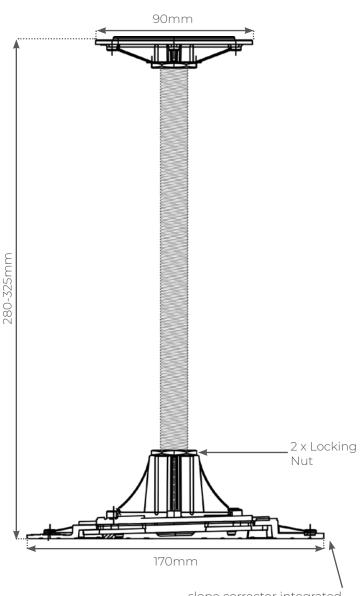

slope corrector integrated

COMPRESSION TEST

Load testing has been performed on the range of A-PED pedestals to 6 tons and we will certify to + 3 tons per pedestal.

For more information, please contact info@buzonuk.com

APPLICATION

Non-combustible adjustable pedestal, ideal for any hard landscaping or external flooring project including high-rise balconies requiring a Class A fire-rating.

Suitable for sites where the void is minimal, the pedestal can be used in conjunction with the 170mm Spreader Plate accessory in situations where a wider base is required.

The A-PED range has a suite of Class A fire-rated accessories:

- · Spacer Tabs
- · Edging
- · Joists
- Shims (Class B-rated)
- · Membrane Protection (Class A & B-rated versions)

Spacer Tabs



A-PED-TABS-RING-3MM Thickness: 3mm Height: 11mm



A-PED-Key

Locking Key



A-PED-TABS-5MM Thickness: 5mm Height: 13mm

Edging



A-PED-WALL Edge Restraint

Joists



A-PED-JOIST-20 Height: 20mm

PACKAGING

Packaging	Head	TP2	Base	275mm Rod	Nut x 2	Unit
Product per Box	120	60	60	60		items
Unit Weight	0.082	0.112	0.178	0.3575	0.003	kg
Box Weight	9.84	6.72	10.68	21.45		kg
Box Dimension	395x290x200	395x290x200	395x290x200			mm
Boxes per Pallet	48	48	48			qty
Product per Pallet	5,760	2,880	2,880			items
Pallet Dimension	80x120	80x120	80x120			cm

SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Contact us if you require further technical support or advice

buzonuk.com - info@buzonuk.com - +44 (0)20 8614 0874





