



Technical Data Sheet

U-E10-FLEX 1mm Shim for U-TOP-FLEX

COMPONENTS

U-E10-FLEX composed of:
1 x Piece

CHARACTERISTICS

Diameter: \varnothing 175mm
Thickness: 1mm

MATERIAL

Material: SBR
Hardness Shore A Din 53505: 60-80 SHA
Color: Black Density: 1,55 g/cm³
Temperature range: (-30)-+70C°
Tensile Strength Din 53504: 3 Mpa
Elongation at break DIN 53504: 250%



APPLICATIONS

The **U-E10-FLEX** is a **1mm** shim for use with the **U-TOP-FLEX** support. It goes on the head of the pedestal to aid stability, deaden sound and can be used whole or in parts to compensate for any variations in the paver thickness.

CAD files are available for download from our [Resource Centre](#)

PACKAGING

Packaging	U-E10-FLEX	Unit
Pieces per carton	240	pcs
Carton weight	7.7	kg
Carton per pallet	48	pcs
Pieces per palle	11,520	pcs
Pallet dimensions	80x120x110	cm

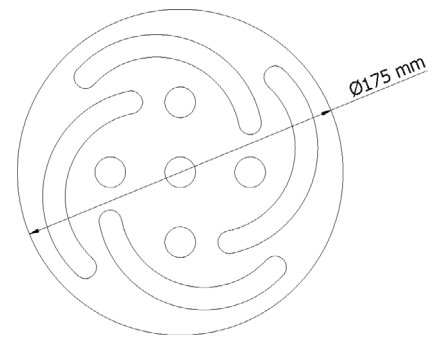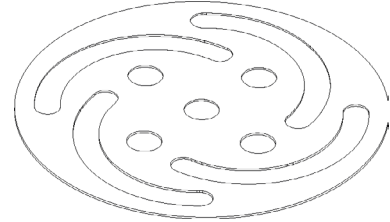

SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Contact us if you require further technical support or advice

buzonuk.com - info@buzonuk.com - +44 (0)20 8614 0874



Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.