



# Technical Data Sheet

## U-TABS-2MM H17 Spacer Tab for U-EDGE & U-TOP-FLEX

### COMPONENTS

The U-TABS 2MM H17 is composed of:  
1 x Piece

### CHARACTERISTICS

Weight: 0.001kg  
Height: 17mm

### MATERIAL

Copolymer polypropylene (CPP)  
Composition: +/- 80% first grade pre-selected recycled CPP, and +/-20% Talc + Masterbatch black  
Designed and manufactured in Europe  
Use of recycled materials exclusively of EU origin  
Resistant to weathering, sea salts, algae and a wide range of chemicals  
Temperature range: -30C° to +80C°


CAD files are available for download from our [Resource Centre](#)

### APPLICATIONS

The spacer tabs U-TABS-2MM H17 can be used with both the U-EDGE and the U-TOP-FLEX products. They are fixed in place by pressing them in to the slots in the desired location and will create an even gap between tile pieces.

### PACKAGING

Packaging	U-TABS-2MM H17	Unit
Pieces per carton	1,200	pcs
Carton weight	1.57	kg
Carton dimension	410 x 320 x 95	mm
Cartons per pallet	180	pcs
Pieces per pallet	216,000	pcs
Pallet dimensions	100 x 120 x 220	cm

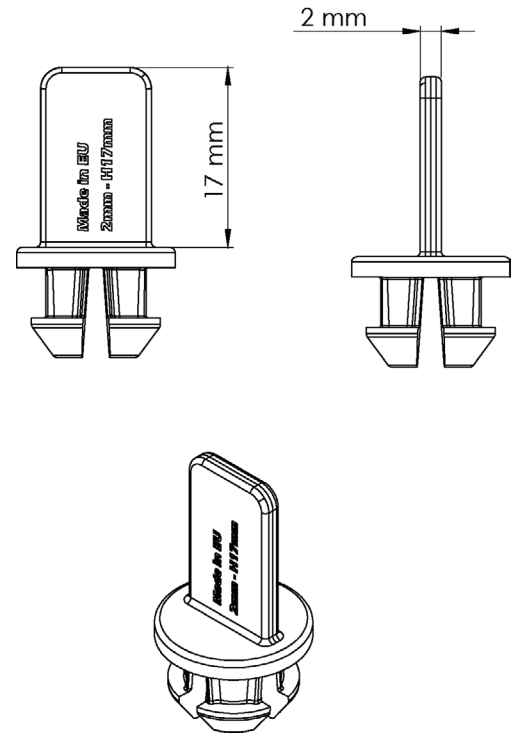

## **SAFETY INSTRUCTIONS**

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

**Contact us if you require further technical support or advice**

**[buzonuk.com](http://buzonuk.com) - [info@buzonuk.com](mailto:info@buzonuk.com) - +44 (0)20 8614 0874**



Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.