



Technical Data Sheet

U-TOP-FLEX Head for specific tile shape

COMPONENTS

U-TOP-FLEX composed of:
1 x Complete unit

CHARACTERISTICS

Diameter: \varnothing 175mm
Weight: 0.097kg
Additional height: 14mm

MATERIAL

Copolymer polypropylene (CPP)
Composition: +/- 80% first grade pre-selected recycled CPP, and +/- 20% Talc + Masterbatch black
Designed and manufactured in Europe.
Use of recycled materials exclusively of EU origin.
Resistant to weathering, sea salts, algae and a wide range of chemicals.
Temperature range: -30C° to +80C°

APPLICATIONS

The U-TOP-FLEX is a plate that is attached to the head of the pedestal to facilitate the laying of specific tile shapes e.g., hexagonal or triangular.




U-TAB spacer tabs can be positioned in the fixed position slots for square or rectangular pavers, or there are multi-position slots to accommodate angled or curved tile shapes.

Compatible with all pedestals in the PB and DPH ranges, it requires the use of attachment U-FIX-PLATE-1, PB-KIT-8 or PB-KIT-8-S depending on which pedestal model is being used.

CAD files are available for download from our [Resource Centre](#)

PACKAGING

Packaging	U-TOP-FLEX	Unit
Pieces per carton	48	pcs
Carton weight	5.17	kg
Carton per pallet	80	pcs
Pieces per palle	3,840	pcs
Pallet dimensions	100x120x220	cm

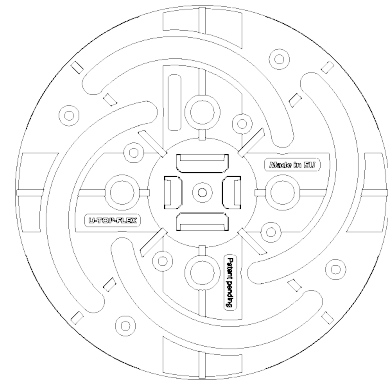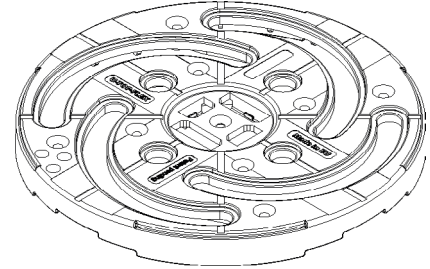

SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Contact us if you require further technical support or advice

buzonuk.com - info@buzonuk.com - +44 (0)20 8614 0874



Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.